



DBV300-35-L

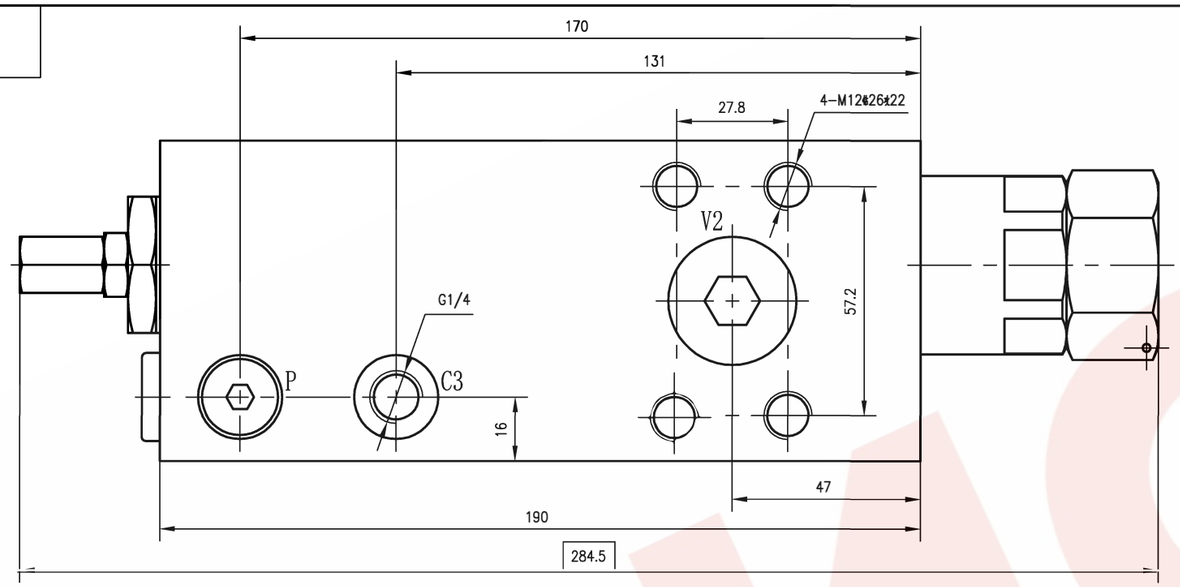



原理图

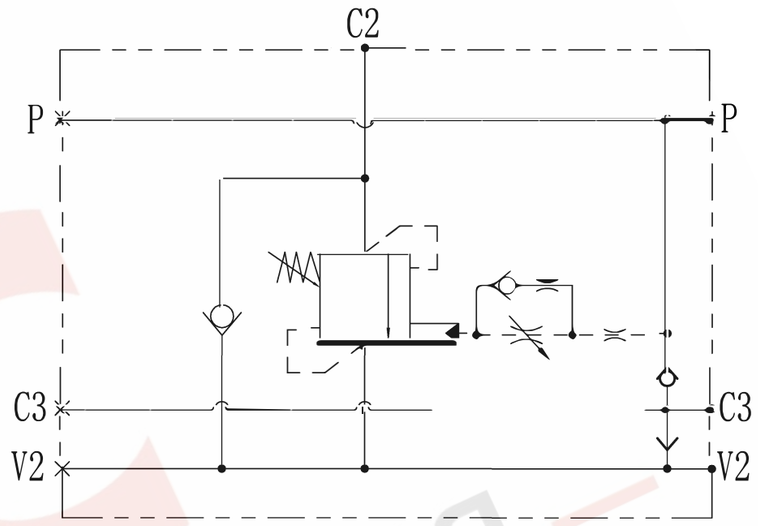

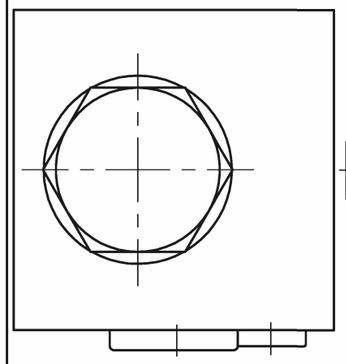

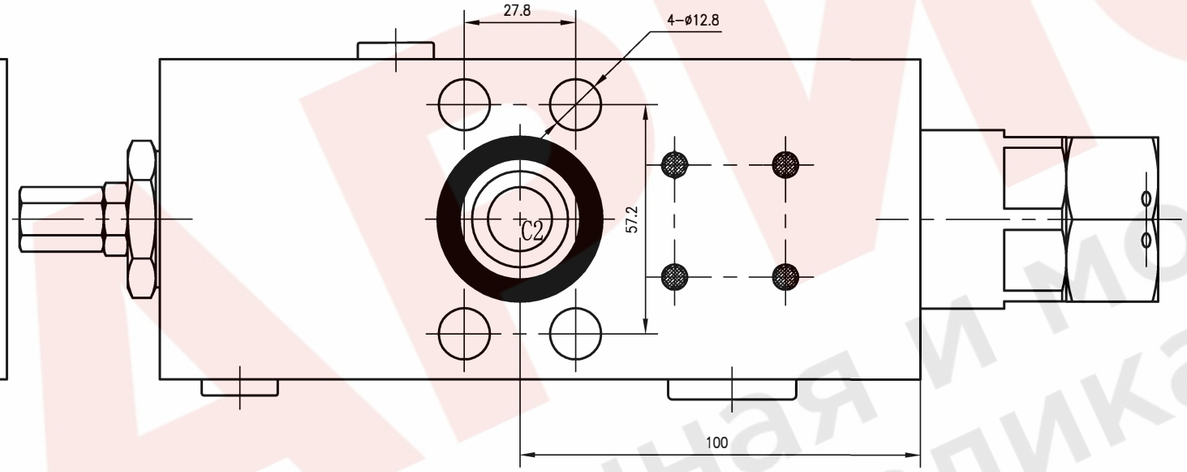

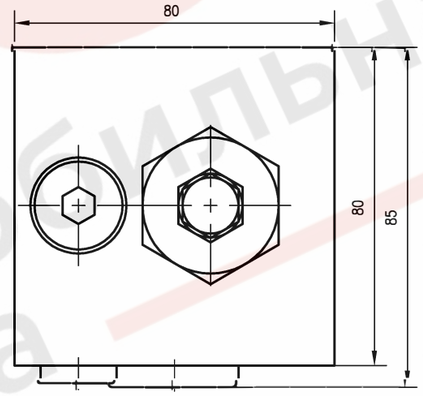

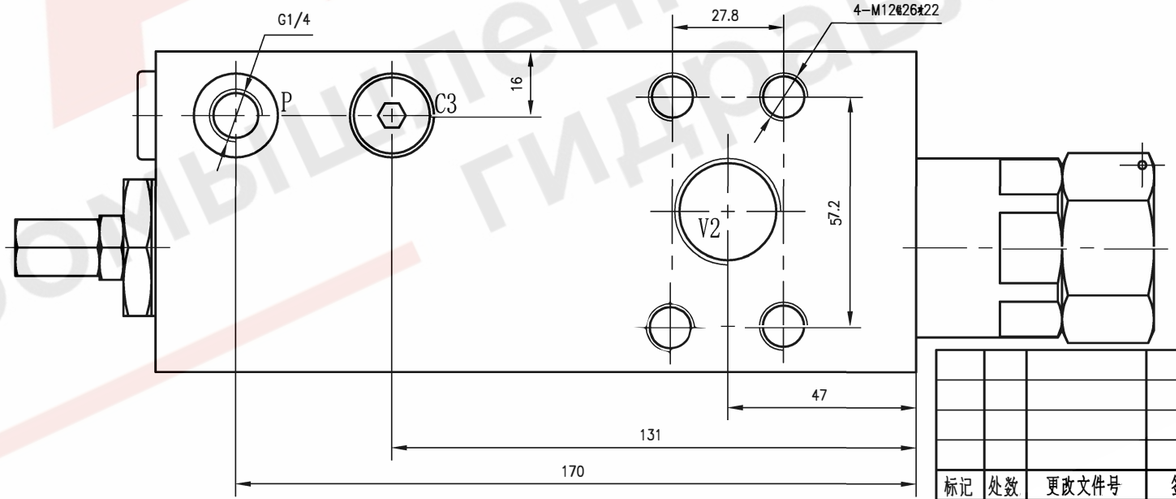

Technical requirements:

1. Maximum working pressure: 350bar;
2. Maximum flow rate: 300L/min;
3. Pilot ratio: 13:1;
4. Balance valve relief pressure setting: adjust pressure range is 250-500bar, and setting 450bar when delivery;
5. Operating oil temperature range: -40 ℃ to +85 ℃ ;
6. Range of atmosphere temperature: -45 ℃ to +50 ℃ ;
7. Valve body surface white zinc electroplated, neutral salt spray test for 96h;
8. The working fluid of the hydraulic system is mineral oil with a viscosity of 7.4-420cSt;

技术参数：

1、最大工作压力350bar；
2、最大流量300L/min；
3、先导比13；
4、平衡阀溢流压力设置：调压范围250~500bar，出厂设定450bar
5、工作油温范围：-40℃至+85℃；
6、环境油温范围：-45℃至+50℃；
7、阀体表面镀白锌，中性盐雾试验96h；
8、液压系统的工作流体为粘度为7.4-420cSt的矿物油；

借通尺件登记
描 图
校 描
旧底图总号
签 字
日 期

标记	处数	更改文件号	签字	日期
设计		标准化		
审核				
工艺		日期		

АРИС
ПРОМЫШЛЕННАЯ И МОБИЛЬНАЯ ГИДРАВЛИКА

图样标记	重量	比例
		1:1.5
共 页	第 页	

Balance valve(平衡阀)

DBV300-35-L

промышленная и мобильная гидравлика